Light

SHEILA OB

Shoe with adjustable velcro straps

Upper	Nappa Leather
Lining	Mesh
Footbed	SJ foam footbed
Outsole	EVA/Rubber
Safety standard	OB / ESD, A, E, SRC
Size range	EU 35-42 / UK 3.0-8.0 US 5.5-10.5 / CM 23.0-27.0
Sample weight	0.250 kg
Norms	EN ISO 20347:2012 ASTM F2892:2018

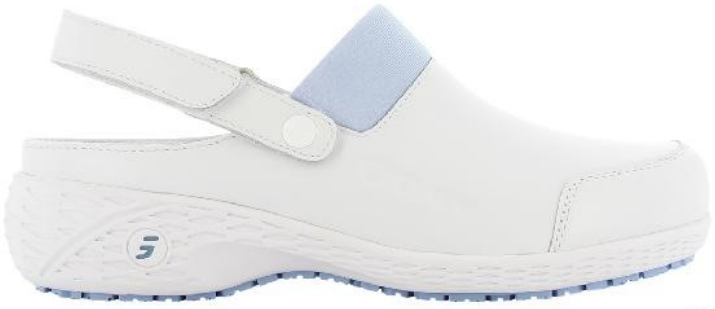

LBL

FUC

WHT

Removable insole
Renew your insole at a regular base or use your own orthopedic insoles for a higher comfort.

Electrostatic Discharge (ESD)
ESD provides the controlled discharge of electrostatic energy that can damage electronic components and avoids risks of ignition resulting from electrostatic charges. Volume resistance between 100 KiloOhm and 100 MegaOhm.

Industries:
Catering, Cleaning, Food & beverages, Medical

Environments:
Dry environment, Extreme slippery surfaces

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20347
Upper	**Nappa Leather**			
	Upper: permeability to water vapor	mg/cm²/h	9.4	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	78	≥ 15
Lining	**Mesh**			
	Lining: permeability to water vapor	mg/cm²/h	43.7	≥ 2
	Lining: water vapor coefficient	mg/cm²	350	≥ 20
Footbed	**SJ foam footbed**			
	Footbed: abrasion resistance	cycles	25600/12800	≥ 400
Outsole	**EVA/Rubber**			
	Outsole abrasion resistance (volume loss)	mm³	134.2	≤ 150
	Outsole slip resistance SRA: heel	friction	0.49	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.43	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.29	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.33	≥ 0.18
	Antistatic value	MegaOhm	NA	0.1 - 1000
	ESD value	MegaOhm	17.1	0.1 - 100
	Heel energy absorption	J	37.3	≥ 20

Sample size: 38